

## Specifications

|                    |                                       |
|--------------------|---------------------------------------|
| Product Name       | Infinite II SQ                        |
| Construction       | Tufted Textured Multi Level Loop Pile |
| Tufted Yarn Weight | 26oz/yd <sup>2</sup>                  |
| Face Yarn          | 100% Bulk Continuous Filament Fibre   |
| Color System       | 100% Solution Dyed                    |
| Gauge              | 1/12                                  |
| Primary Backing    | Polyester Premium Fabric              |
| Secondary Backing  | Antimicrobial Polyvinyl               |
| Pile Thickness     | L-3mm H-5mm                           |
| Total Thickness    | 7mm ± 0.5                             |
| Tile Size          | 50cm x 50cm                           |

## Performance Test

|                                         |                                                                              |
|-----------------------------------------|------------------------------------------------------------------------------|
| Volatile Organic Compounds(VOCs)        | :Pass ASTM D7706-11                                                          |
| Semi-Volatile Organic Compounds (SVOCs) | :Pass ASTM D7706-11                                                          |
| Formaldehyde Emission                   | :Pass NIOSH method 2016                                                      |
| Flammability                            | :Pass GB 8624-2006<br>Pass GB/T 14768-93                                     |
| Smoke Density                           | :Pass ASTM-E-662<=450 DMC<br>Pass GB 8624-2006                               |
| Static Generation                       | :Pass AATCC-134<br>Pass GB/T 18044-2000                                      |
| Colorfastness to Water                  | :Pass AATCC-16E<br>Pass Grade 4/5 ISO 105-X12<br>Pass BS EN ISO 105 E01:1996 |
| Colorfastness to Light                  | :Pass AATCC-16E<br>Pass Grade 5 ISO-B02:1994E<br>Pass BS EN ISO 105 B02:1999 |
| Colorfastness to Crocking               | :Pass BS EN ISO 105-X12:2002                                                 |
| Tensile Strength Test                   | :Pass ISO13934-1<br>Warp 3112.9                                              |



Ultraviolet Resistance



Water Resistance



Reduce Flammability



Passed Various Tests



Fashion Color



Antistatic



Environmental



Dimensional Stability



Random



Quarter-turn



Monolithic



Ashlar



Brick

FLOORMART™

FLOORMART™

*Infinite II SQ*

Infinite II SQ



BF738-03




BF738-04



BF738-05



BF738-06

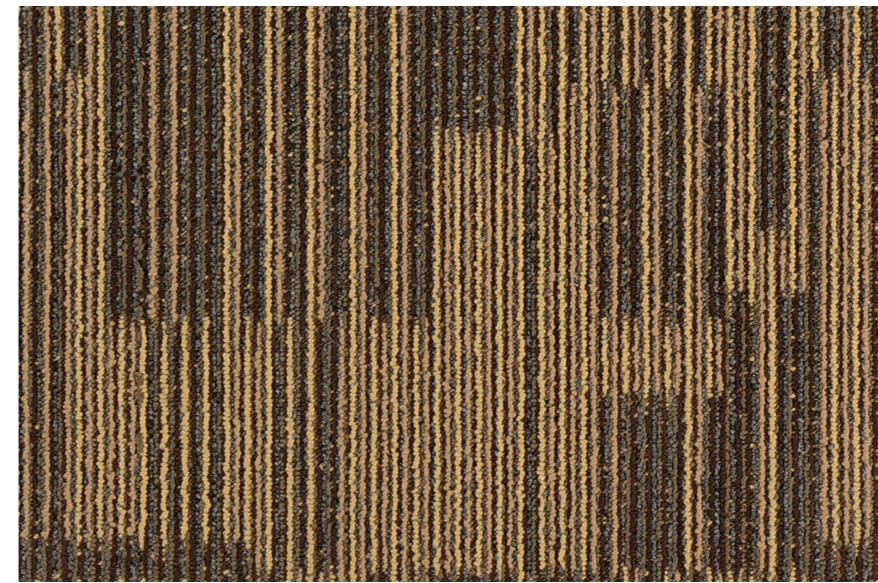

BF738-03



BF738-04



BF738-05




BF738-06



BF738-03



BF738-04

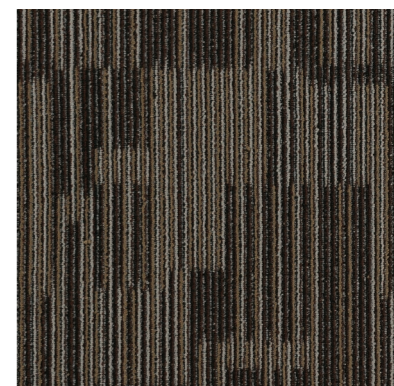

BF738-05



BF738-06