



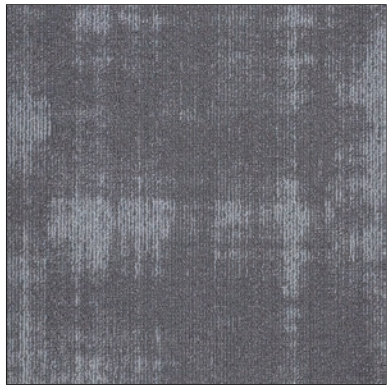


SH37WS3-01


MODULAR

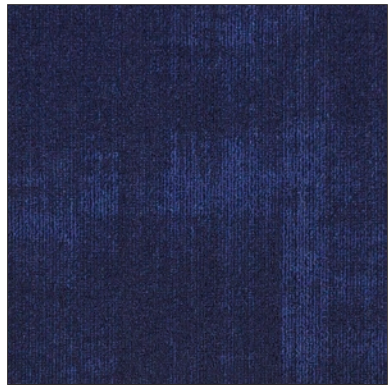


SH37WS5-04

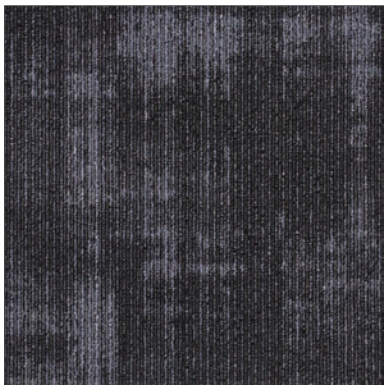

SH37WS1-02

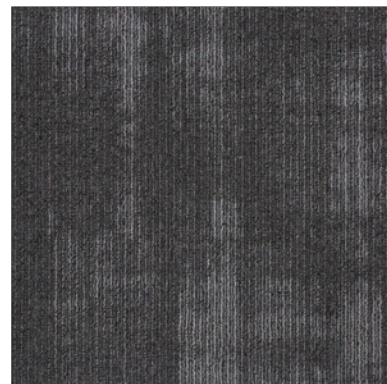

SH37WS2-05

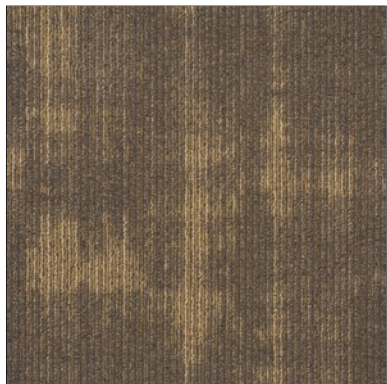

SH37WS4-03

Shine

Specification


|                    |                                     |
|--------------------|-------------------------------------|
| Product Name       | Shine                               |
| Pile Construction  | Texture Multi-Level Loop            |
| Tufted Yarn Weight | 520g/m²                             |
| Face Yarn Type     | 100% Bulk Continuous Filament Fiber |
| Dye Method         | 100% Solution Dyed                  |
| Machine Gauge      | 1/12                                |
| Primary Backing    | Polyester Premium Fabric            |
| Secondary Backing  | PVC with Fibreglass                 |
| Pile Thickness     | 3.5mm ± 0.5                         |
| Total Thickness    | 5.5mm ± 0.5                         |
| Tile Size          | 50cm x 50cm                         |

Performance Test


|                                         |                             |
|-----------------------------------------|-----------------------------|
| Volatile Organic Compounds (VOCs)       | Pass ASTM D7706-11          |
| Semi-Volatile Organic Compounds (SVOCs) | Pass ASTM D7706-11          |
| Formaldehyde Emission                   | Pass NIOSH method 2016      |
| Flammability                            | Pass GB 8624-2006           |
|                                         | Pass GB/T 14768-93          |
| Smoke Density                           | Pass ASTM E-662 <=450 DMC   |
|                                         | Pass GB 8624-2006           |
| Static Generation                       | Pass AATCC-134              |
|                                         | Pass GB/T 18044-2000        |
| Colourfastness to Water                 | Pass AATCC-16E              |
|                                         | Pass Grade 4/5 ISO 105-X12  |
|                                         | Pass BS EN ISO 105 E01:1996 |
| Colourfastness to Light                 | Pass AATCC-16E              |
|                                         | Pass Grade 5 ISO B02:1994E  |
| Colourfastness to Crocking              | Pass BS EN ISO 105 B02:1999 |
| Tensile Strength Test                   | Pass BS EN ISO 105-X12:2002 |
|                                         | Pass ISO 13934-1            |
|                                         | Warp 3112.9                 |

Disclaimer


- This carpet is manufactured and sold for floorcovering use only.
- As with all carpets, colours are subject to dye lot variations.
- All carpet specifications reflect averages derived from product sample testing, are subject to normal manufacturing and testing tolerances and inherent pattern variances, and may be changed without notice.
- “Tufted Pile Weight” refers to total input weight of yarn used in tufting process, and processes such as tufting, shearing and carving will result in a lower finished yarn weight in purchased carpets.

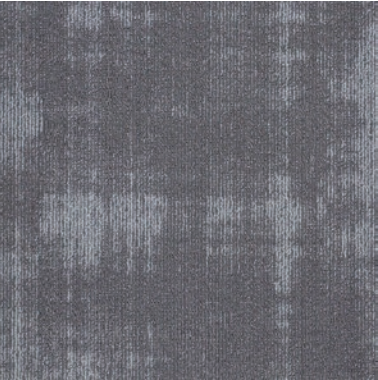


SH37WS3-01

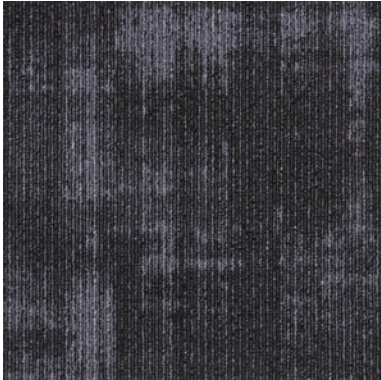


SH37WS1-02

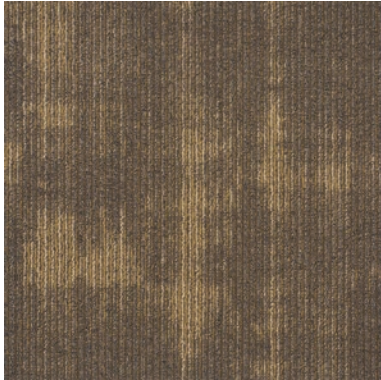

SH37WS4-03

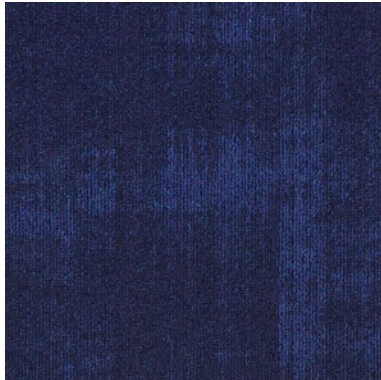


SH37WS5-04

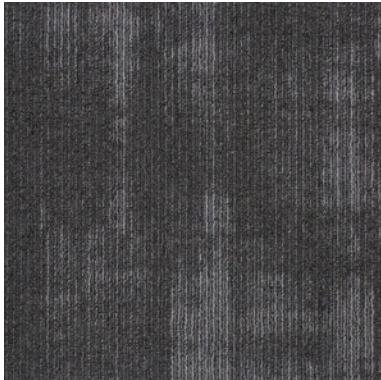

SH37WS2-05



MODULAR



MODULAR

malaysia

Shine

Shine